

RP50双极防水按钮开关 16(8)A 250Vac



- ▶ 密闭防水设计
- ▶ 可带灯
- ▶ 通断电流可选
- ▶ 外表协调美观
- ▶ 双极按钮开关



16(8)A 250Vac 1E4
12(12)A 250Vac 5E4
25T125/55



16A 125/250Vac
125Vac 3/4HP
250Vac 3/2HPT100


R P 50 C ---

系列 类别 功能 端子 特征序号：壳体、按钮、印字、颜色、电压等

功 能		端 子	壳 体	按 钮
		C 6.3X0.8 	面板开孔 	标准型
RP50	ON-OFF 			
RP53	ON-OFF (带灯) 	H 4.7X0.8 	面板厚度 $X^{+0.1}_0$ $Y^{+0.1}_0$ 0.75~1.25 30 1.25~2.0 30.3 22.1 2.0~4.0 30.6	带灯
RP60	ON-ON 			

防护等级：
IP40 无密封圈
IP54 带密封圈
IP55 带密封圈，专用面板

外形尺寸 (mm)

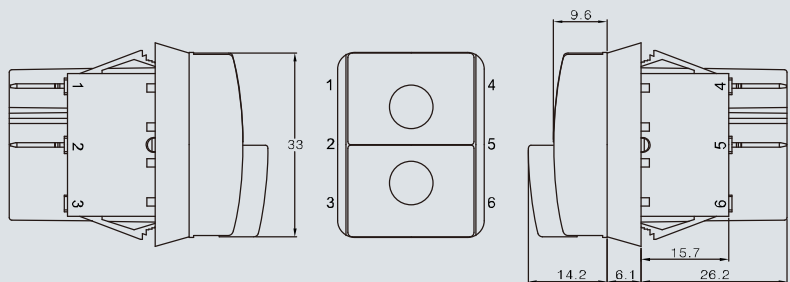

专用面板尺寸 (适合O形密封圈)：

位置	尺寸	公差
A	30	+0.2
B	22	+0.1
C	33.6	+0.1
D	26.6	+0.1
E	0.7~3.5	
F	5.5	+0.2
G	R3.5	-0.1
H	R0.5	+0.2
K	1.2	+0.1

